


**STEPS FOR CHANGING THE BLADE**

**BLADE KIT:**


1. presser/masher
2. rosette blade
3. top blade
4. cup/holder

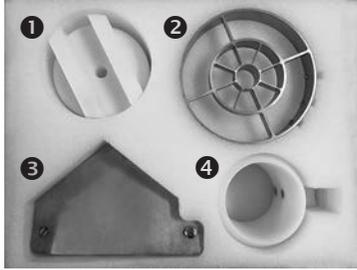

1. Remove top blade by turning counter-clockwise.

**CAUTION: VERY SHARP BLADES!  
CUT-SAFE GLOVES RECOMMENDED.**

2. Do not remove bottom blade.

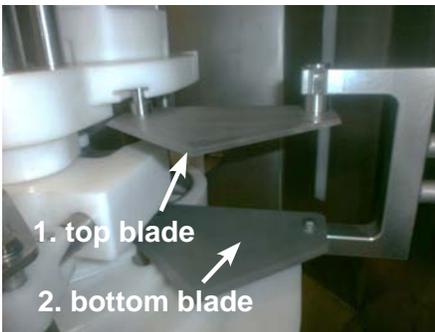

3. Remove the Rosette Blade from the cutout in the connecting unit. Pay attention to positioning and sharp side up. Be sure to lift blade up, by pressing it from the bottom. Then remove it.


**CAUTION: VERY SHARP BLADES!  
CUT-SAFE GLOVES RECOMMENDED.**



4. Remove the safety pin.



5. Remove the presser/masher from the machine.

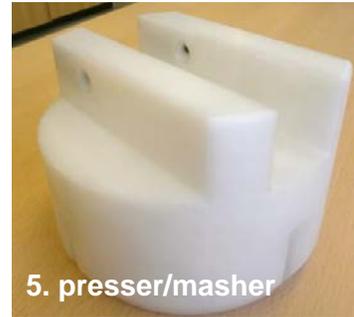

6. Twist the pineapple cup/holder from the valve.



7. Place the parts back into the machine in reverse order:
  - a. Place part 6, the cup holder, into the machine.
  - b. Place part 5, the presser/masher, into the machine and fix it with the safety pin (number 4) to the press unit.
  - c. Place part 3, the rosette blade into the cutout of the connecting beam. Pay attention to positioning and sharp side up.
  - d. Place part 1, the top blade into the machine. Place it in the cutout of the connecting beam. When placed, press the blade to lock it in correctly. The top blade is marked with the size on the end of the knob.

Close and lock the door. Press flashing red button to "home" the machine allowing it to perform one full cycle and prepare it for use. Put other size blades back into container.